BlueMaster® AdBlue® Storage & Dispensing Solutions Product Guide

Available from 1300 – 9000 litres








Intelligent AdBlue® Storage and Dispensing Solutions

Available from 1300 -9000 litres

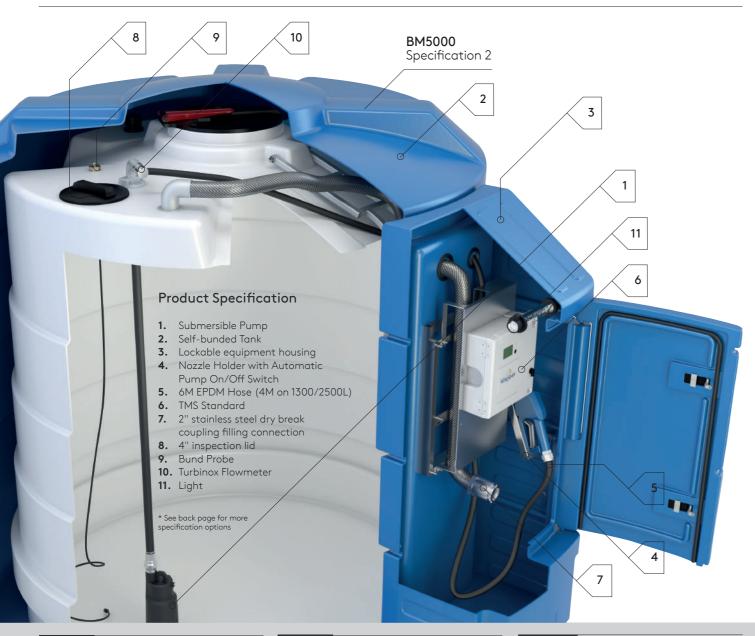

BlueMaster®







The Kingspan BlueMaster range offers a robust and convenient on site storage solution. This range has been specifically designed for the secure storage, dispensing and protection of AdBlue®.

The BlueMaster range is available from 1300 - 9000 litres with a number of specification options and intelligent tank management and monitoring systems to suit all agricultural, construction, mining and transportation requirements.

All BlueMaster tanks are double skinned for environmental protection and to safeguard against contamination.

Kingspan BlueMaster tanks ensure your AdBlue® remains pure for its lifetime in the tank protecting your assets and the environment. This is accomplished in three ways:

Closed Fluid Path

Manufacturers of AdBlue® agree that the closed controlled systems, like those found in Kingspan BlueMaster tanks, rigorously maintain AdBlue® purity.

Manufacturing and Material Compliance

All BlueMaster tanks conform to the highest manufacturing and material compliance standards (ISO 22241, DIBT, BS EN ISO 9001:2008) to deal with the chemical characteristics of AdBlue®.

Expertise & Knowledge

Kingspan has over 40 years' expert experience in the engineering and manufacturing of liquid storage solutions. Over the past 10 years we have worked with AdBlue® producers to create one of the safest and most environmentally responsible storage solutions available.

Quality

> Quality product and quality service ensure absolute peace of mind. With Kingspan your AdBlue® purity and your vehicles are protected.

Return on Investment

> Onsite bulk storage means you, as an AdBlue® user, benefit from better logistical planning and fleet owners can purchase larger volumes - saving everyone time and money.

Service

> Exceptional customer service is our top priority which is why we offer full technical and aftersales support, a trustworthy guarantee.



Product Specification 2

- 1. Mechanical (pneumatic) level gauge
- 2. K24 Flowmeter

Warranty for tank: 10 years; for equipment: 2 years.*

* The warranty applies to product used in accordance with





Capacity	5000 litres
Length	2850 mm
Width	2250 mm
Height	2350 mm

BM5000 SLIMLINE




5000 litres
3900 mm
1150 mm
2340 mm

BM9000



Capacity	9000 litres
Length	3280 mm
Width	2450 mm
Height	2950 mm



BM1300

BM2500



Capacity	2500 litres
Length	2460 mm
Width	1460 mm
Height	1860 mm

BM4000

Capacity	4000 litres
Length	3900 mm
Width	1150 mm
Height	2340 mm

Specification Options

Detailed data sheets are available for each of the specification options below.

BlueMaster® Standard

Bundle Options	Specification 1	Specification 2
Submersible pump	•	•
TMS Standard		•
2" Stainless Steel dry break coupling fill connection	•	•
Mechanical level gauge	•	
4 m/6 m EPDM hose (4 m Hose for 2500 L, 6 m Hose for 4000 L & 5000 L)	•	
Automatic nozzle & holder with pump on/off switch	•	•
Digital Flowmeter attached to nozzle	•	
Housing (Small on 5000 L)	•	
Mechanical Flowmeter		•
Level display through TMS		•
Light in Housing	•	•
Capacities & product code	1300L - 0010270 2500 L - 0010271 4000 L - 0010273 5000 L - 0010274 9000L - 0010275	2500 L - 0010091 4000 L - 0010093 5000 L - 0010097 5000 L Slimline - 001009 9000L - 0010095

^{*} Ventilation Fan is optional for all specifications



(Formerly known as Tanclean Pvt Ltd)

128, Lodha Supremus II, North Wing,

Road No.22, Wagle Industrial Estate, Thane - 400 604, MAHARASHTRA, INDIA.

T: +91 22 49748989 M: +91 98191 96593 shubhamacqualink.com



